


ARIET

3-phase PDU 32A Total monitoring

Shell material	1.4U(62x44.5) aluminum
Input voltage	380V-433V 50/60 Hz
Output voltage	220-250Vac
Maximum current	32A
Input wire specifications	5G*6mm ² *2M
Input plug	IEC60309 5-core 32A industrial plug
Output socket	21-outlet C13&3-outlet C19 (optional 20-outlet C13& 4-outlet C19)
Max	250V 10A&16A
Internal cable	main line 6mm ²
Installation mode	Upper cable, vertical installation
Intelligent control	PDU meter, monitoring
Option	Control and monitoring, machine options from TIER 1 manufacturers

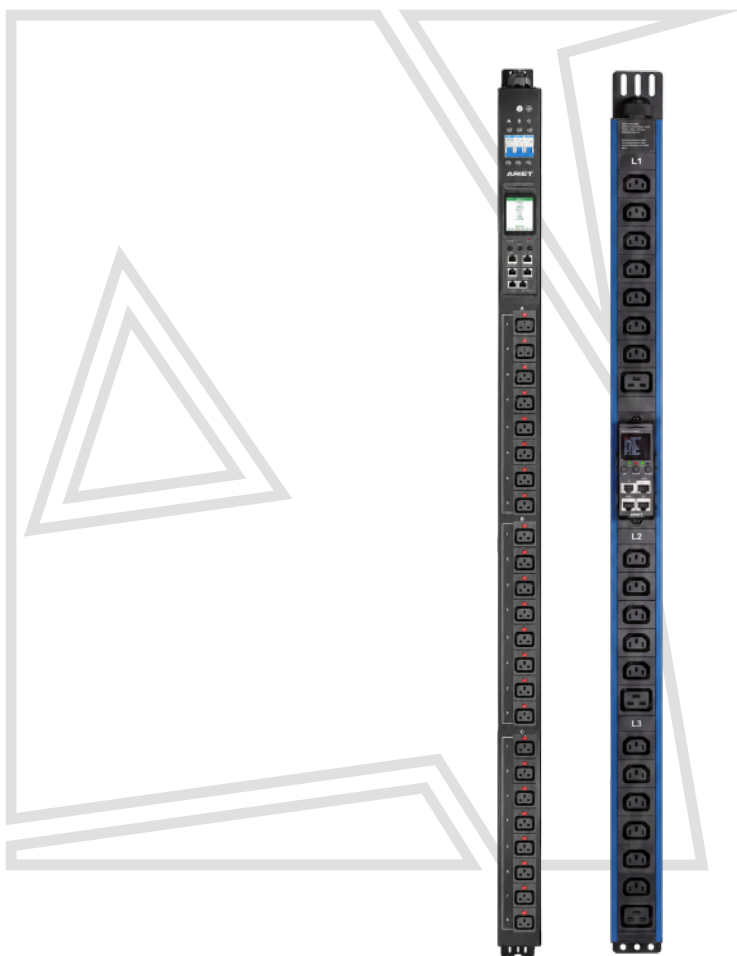

Real-Time Monitoring

Continuous tracking of voltage, current, and power consumption



Local Display Interface

On-device LCD for instant data access



Improved Power Visibility

Better understanding of energy usage across devices



AI Data Centers



Cloud Infrastructure



Remote IT Systems